

Orion's new wet listed fluorescent luminaire provides superior light output with minimal electricity use, for locations where a water-tight fixture is required.

Orion's patented lighting systems incorporate superior optical and thermal efficiency to deliver the most output with the least input. After all, every watt saved drops right to your bottom line year after year.

WTAG611W Standard Features

- UL wet listed
- Stainless steel exterior hardware, latches, and mounting brackets, along with powdercoated exterior aluminum surfaces, for improved resistance to corrosion and caustic substances
- Sealed and gasketed
- Liquid tight cord grip with factory installed 11' whip
- Patented reflector design
- Hinged acrylic lens


Custom Accessories

- Consult factory with application specifications

Warranty Information

Orion's fixtures and accessories are covered by individual component warranties as specified by OEM suppliers. Information available upon request.

Patent Pending

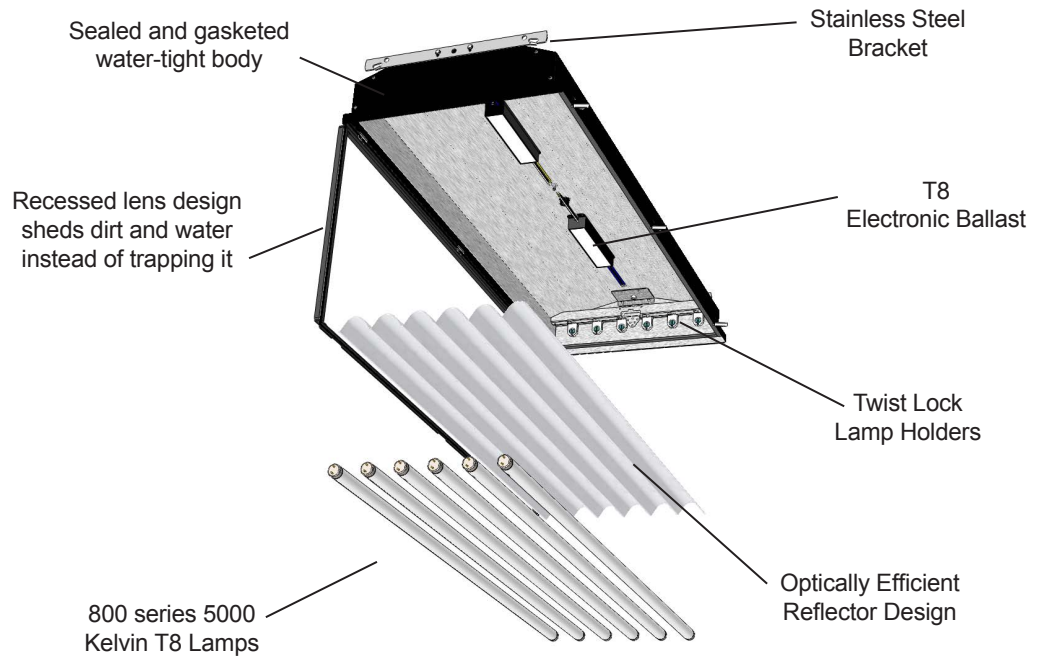

TECHNICAL	DATA
T8, 4ft Water-Tight Enclosure high bay, 6 lamp, liquid tight cord grip with factory installed 11' whip, two universal 3-lamp instant start high output ballasts, stainless steel hardware, stainless steel MB bracket, no hanging cables attached, GE 42064 lamps, bulk packaged (Part No. WTAG611W)	
Fixture Body	Aluminum
Lamp Holders	T8 Twist Lock
Connection Type	Factory Installed 11' whip
Fixture Dimensions	48.5" (L) x 18.63" (W) x 5.63" (H)
Fixture Weight (less lamps)	18.5 lbs.
Wattage Consumed	221 @ 120-277v 232 @ 480v
Ballast Factor	1.15
Line Amps*	1.84 @ 120 v 1.06 @ 208 v 0.92 @ 240 v 0.80 @ 277 v 0.48 @ 480 v
Total Harmonic Distortion	<13%

*Transformer must be purchased separately

*This fixture is designed to minimize corrosion in as many environments as possible. Because of the many variables affecting corrosion, actual end-user environmental testing is required to assure corrosion resistance. End-user / Installer assumes all liability for the suitability of the fixture for the environment